




# BOAT RAMP KIT

# MAKING SUSTAINABLE TRACKS

Designed to minimise environmental damage, the quality of our manufacturing techniques mean our Trackway® panels have a long working life and are 100% recyclable. Significantly more hard-wearing than plastic alternatives which need to be frequently changed, our aluminium panels reduce ruts forming in the ground and once dismantled, leave no trace within the surrounding environment.

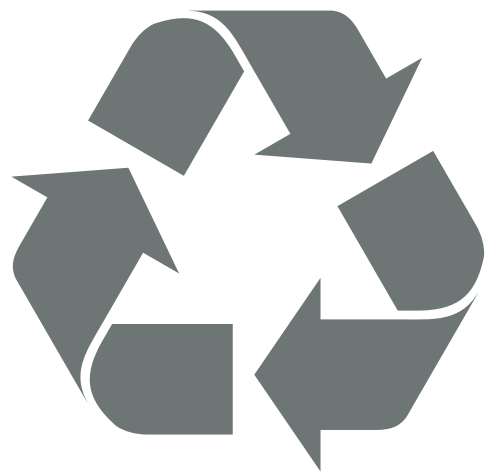

A blue boat is positioned on a portable trackway system, which consists of a series of parallel metal tracks. The trackway is laid out over a body of water, and the boat is being moved along it. The background shows a calm body of water and a dark, rocky shoreline. The text is overlaid on the image in a large, white, sans-serif font.

# Portable Trackway<sup>®</sup> to maximise the mobility of boats and other watercraft

Foot protection is required  
for walking on all Trackway<sup>®</sup>  
aluminium products.

The Boat Ramp Kit facilitates the easy launch and recovery of watercraft and vehicles. Used as a temporary access route, or a more permanent solution, the Boat Ramp Kit can be used in areas where it is not suitable for conventional boat ramp structures such as tidal areas, freezing waters, and marsh. This cost effective solution comprises of a Trackway® panel of choice, and an array of deployment options and accessories - getting your boat to shore has never been easier!

# TRACKWAY® SOLUTIONS



## CAPABILITY

Suitable for wheeled vehicles, boat trailers, and marine equipment;

Used for as little as a day or a more permanent installation;

Ensures ground / environmental protection;

Provides a high traction surface;

Laid and recovered quickly and efficiently.

## SPECIFICATION

Aluminium panels, joined together by a tongue and groove joint, with locking bolts to secure;

Designed to be constantly reused, has a long operational life and is recyclable;

Withstands ambient temperatures ranging from -40°C to +60°C;

Does not float and is suitable in flowing water;

Anodised as standard;

Easily cleaned due to open nature of profile;

Half panels every 5m for easy splitting and joining.

# C40 TRACKWAY®

C40 Trackway® is designed to withstand repeated passes of vehicles with a gross weight of up to 100 tonnes, with a maximum axle load of 13 tonnes. Available in two widths, the C40 Trackway® can be deployed by either a Pushframe, a Pushbar, Parbuckling Straps, or by hand.

Item	Dimensions per Panel	
	Width Option 1	Width Option 2
✓ Width:	3,354mm	4,200mm
✓ Length:	214mm	214mm
✓ Effective Length:	194mm	194mm
✓ Height:	31mm	31mm
✓ Weight:	15.4kg	19.2kg
✓ Weight / Area:	23.7kg/m <sup>2</sup>	23.7kg/m <sup>2</sup>






#### Dimensions per Panel

Item	Measurement
✓ Width:	4,572mm
✓ Length:	230mm
✓ Effective Length:	214mm
✓ Height:	32mm
✓ Weight:	31.9kg
✓ Weight / Area:	33.3kg/m <sup>2</sup>

## C90 TRACKWAY®

C90 Trackway® is designed to withstand repeated passes of vehicles with a gross weight of up to 150 tonnes, with a maximum axle load of 18 tonnes. Available in one width, the C90 Trackway® can be deployed by either a Pushframe, a Pushbar, by Parbuckling Straps or by hand.

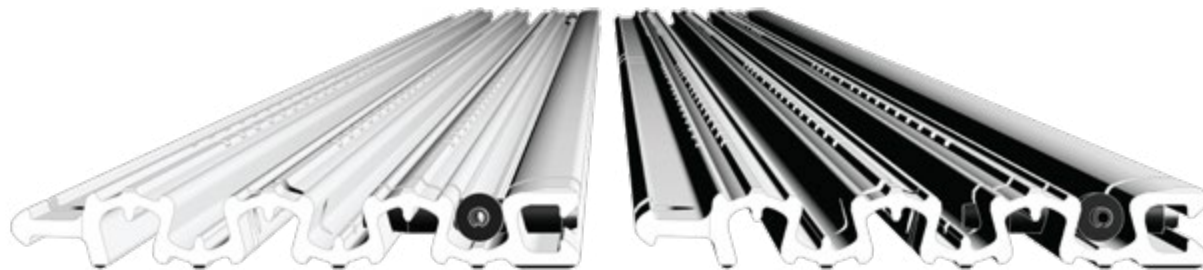

# DEPLOYMENT OPTIONS

## PUSHFRAME

Manufactured from steel, and painted as standard, the Pushframe is designed to roll out and recover up to 50m of C40 Trackway® or C90 Trackway® by use of a compatible host machine with a quick hitch, or suitable hitch.



Item	Dimensions
✓ Width:	1,311mm
✓ Length:	853mm
✓ Effective Length:	1,113mm
✓ Height:	260.4kg

Dimensions are host machine dependent.  
Above dimensions based on JCB 3CX, 4CX, 436

# PUSHBAR

The Pushbar is a galvanised steel device with plastic wheels, designed to roll out and recover up to 40m of C40 Trackway® or 30m of C90 Trackway® by use of a vehicle with a minimum of 3,500kg tow capacity, and either:

1. A towing hitch or pin suitable for a 76mm diameter towing eye;
2. 50mm trailer towing hitch ball.

		Dimensions	
	Item	Stowed	Deployed
✓	<b>Width:</b>	518mm	518mm
✓	<b>Length:</b>	2,225mm	2,256mm
✓	<b>Effective Length:</b>	366mm	975mm
✓	<b>Height:</b>	63kg	63kg



# PARBUCKLING STRAP

The Parbuckling strap assists with the recovery of C40 Trackway® or C90 Trackway®. Positioned underneath the roll of Trackway®, as it is laid out, the Trackway® can be later recovered by attaching a Parbuckling Strap(s) to a vehicle's centre tow point, and driving forward in a slow and controlled manner.



**FAUN Trackway Limited**

Member of the KIRCHHOFF Group

Unit 6, Bryn Cefni Industrial Estate  
Llangefni, Anglesey, North Wales  
LL77 7XA, UK

Tel: +44 (0) 1248 722 777

Fax: +44 (0) 1248 750 490

[info@fauntrackway.co.uk](mailto:info@fauntrackway.co.uk)

[www.f auntrackway.co.uk](http://www.f auntrackway.co.uk)

Images for Illustration Purposes Only

Registered in England and Wales 09283749

All content © FAUN Trackway Limited 2025. All Rights Reserved