

BOAT RAMP KIT





 **FAUN**[®]
TRACKWAY

SUSTAINABLE TRACKS

Engineered with sustainability and performance in mind, our Trackway® panels are designed to minimise environmental impact while delivering long term reliability. Manufactured using advanced techniques and high-grade aluminium, each panel offers exceptional durability and a long operational lifespan. In contrast to plastic alternatives, which often degrade quickly and require frequent replacement, our aluminium Trackway® panels provide a more resilient and cost-effective solution.

Their robust construction helps to prevent ground damage by significantly reducing rutting, even under the weight of heavy vehicles and machinery. Once the panels are removed, the ground is left virtually untouched, preserving the natural landscape and eliminating the need for costly restoration work. Furthermore, our panels are 100% recyclable, aligning with our commitment to environmentally responsible practices across all sectors of operation.

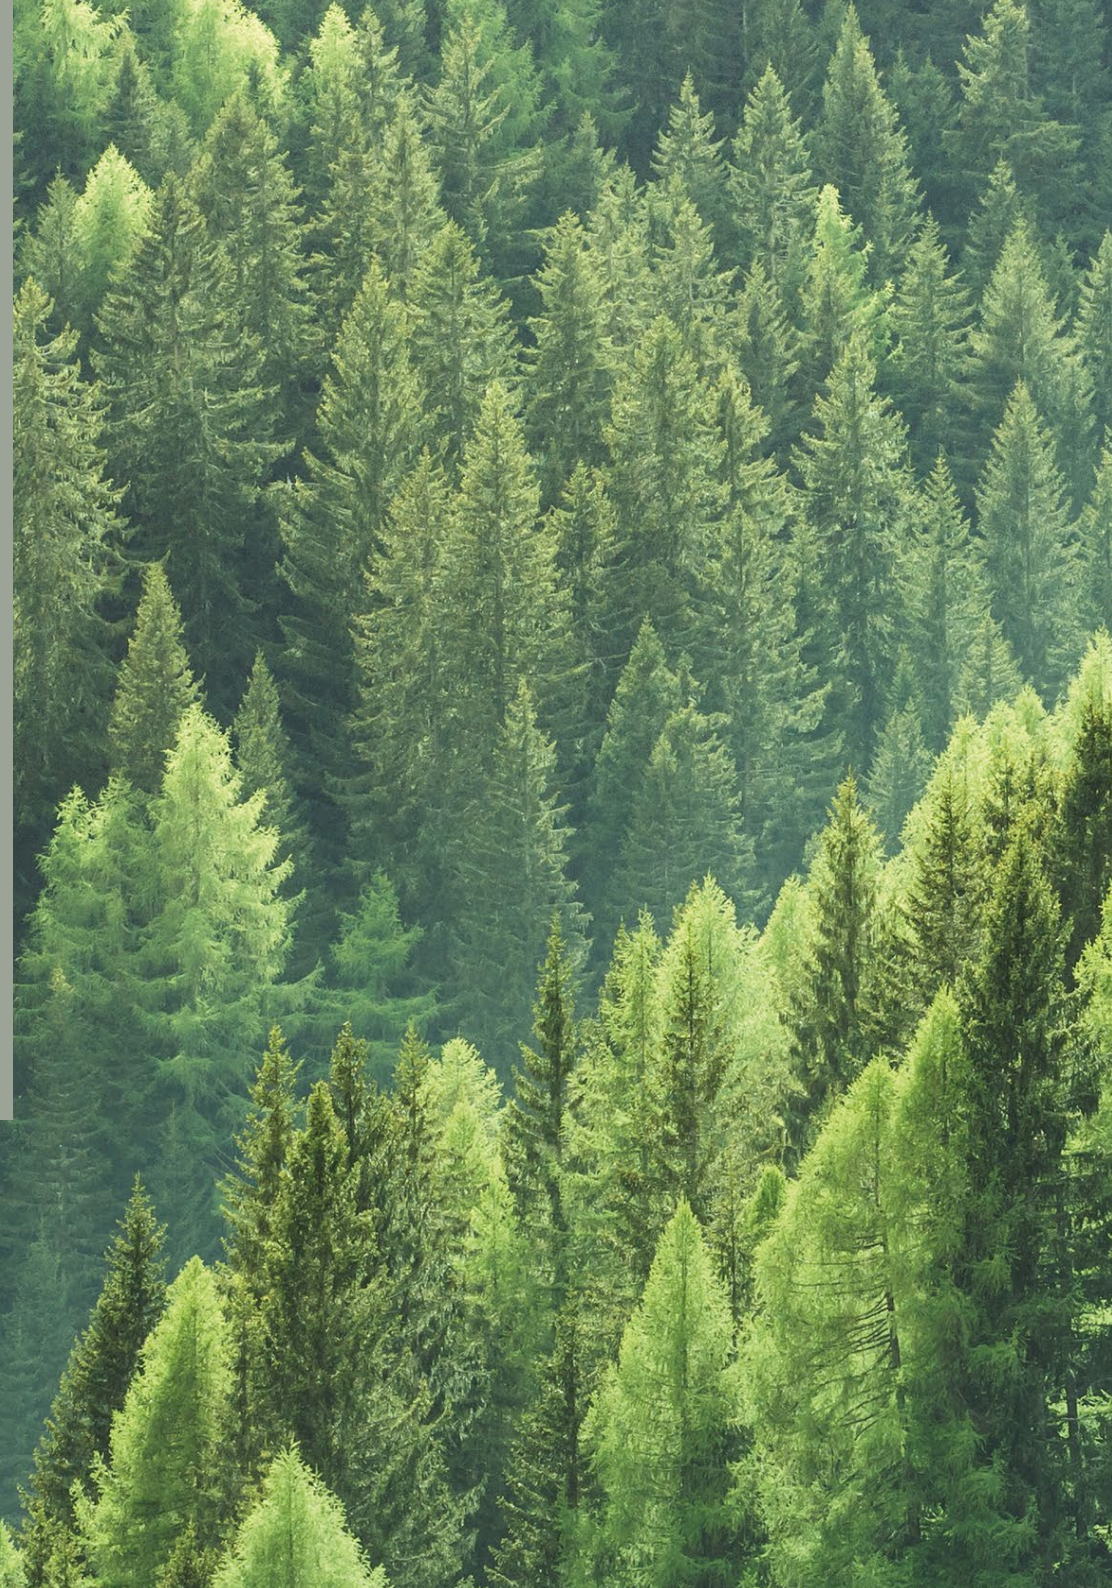

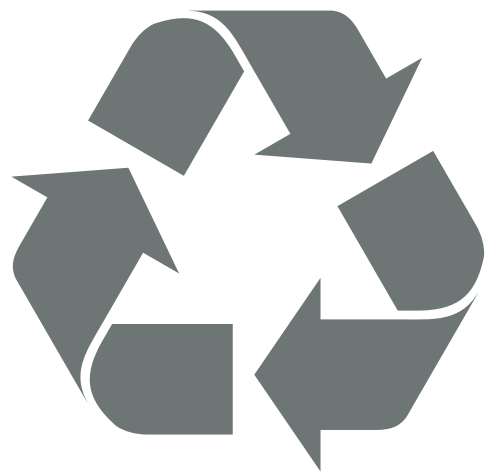



Maximise the mobility of boats and other watercraft

Foot protection required when walking on Trackway®.

The Boat Ramp Kit facilitates the easy launch and recovery of watercraft and vehicles. Used as a temporary access route, or a more permanent solution, the Boat Ramp Kit can be used in areas where it is not suitable for conventional boat ramp structures such as tidal areas, freezing waters, and marsh. This cost effective solution comprises of a Trackway® panel of choice, and an array of deployment options and accessories - getting your boat to shore has never been easier!

TRACKWAY® SOLUTIONS



CAPABILITY

- ✓ Suitable for wheeled vehicles, boat trailers, and marine equipment;
- ✓ Used for as little as a day or a more permanent installation;
- ✓ Ensures ground / environmental protection;
- ✓ Provides a high traction surface;
- ✓ Laid and recovered quickly and efficiently.

SPECIFICATION

- ✓ Aluminium panels, joined together by a tongue and groove joint, with locking bolts to secure;
- ✓ Designed to be constantly reused, has a long operational life and is recyclable;
- ✓ Withstands ambient temperatures ranging from -40°C to +60°C;
- ✓ Does not float and is suitable in flowing water;
- ✓ Anodised as standard;
- ✓ Easily cleaned due to open nature of profile;
- ✓ Half panels every 5m for easy splitting and joining.

C40 TRACKWAY®

C40 Trackway® is designed to withstand repeated passes of vehicles with a gross weight of up to 100 tonnes, with a maximum axle load of 13 tonnes. Available in two widths, the C40 Trackway® can be deployed by either a Pushframe, a Pushbar, Parbuckling Straps, or by hand.

		Dimensions per Panel	
	Item	Width Option 1	Width Option 2
✓	Width:	3,354mm	4,200mm
✓	Length:	214mm	214mm
✓	Effective Length:	194mm	194mm
✓	Height:	31mm	31mm
✓	Weight:	15.4kg	19.2kg
✓	Weight / Area:	23.7kg/m ²	23.7kg/m ²





C90 TRACKWAY®

C90 Trackway® is designed to withstand repeated passes of vehicles with a gross weight of up to 150 tonnes, with a maximum axle load of 18 tonnes. Available in one width, the C90 Trackway® can be deployed by either a Pushframe, a Pushbar, by Parbuckling Straps or by hand.

Dimensions per Panel

	Item	Measurement
✓	Width:	4,572mm
✓	Length:	230mm
✓	Effective Length:	214mm
✓	Height:	32mm
✓	Weight:	31.9kg
✓	Weight / Area:	33.3kg/m ²



DEPLOYMENT OPTIONS



PUSHFRAME

Manufactured from steel, and painted as standard, the Pushframe is designed to roll out and recover up to 50m of C40 Trackway® or C90 Trackway® by use of a compatible host machine with a quick hitch, or suitable hitch.

	Item	Dimensions
✓	Width:	1,311mm
✓	Length:	853mm
✓	Effective Length:	1,113mm
✓	Height:	260.4kg

Dimensions are host machine dependent.
Above dimensions based on JCB 3CX, 4CX, 436

PUSHBAR

The Pushbar is a galvanised steel device with plastic wheels, designed to roll out and recover up to 40m of C40 Trackway® or 30m of C90 Trackway® by use of a vehicle with a minimum of 3,500kg tow capacity, and either:

1. A towing hitch or pin suitable for a 76mm diameter towing eye;
2. 50mm trailer towing hitch ball.



		Dimensions	
	Item	Stowed	Deployed
✓	Width:	518mm	518mm
✓	Length:	2,225mm	2,256mm
✓	Effective Length:	366mm	975mm
✓	Height:	63kg	63kg

PARBUCKLING STRAP

The Parbuckling strap assists with the recovery of C40 Trackway® or C90 Trackway®. Positioned underneath the roll of Trackway® as it is laid out, the Trackway® can be later recovered by attaching a Parbuckling Strap(s) to a vehicle's centre tow point, and driving forward in a slow and controlled manner.





FAUN Trackway Limited

Member of the KIRCHHOFF Group

Unit 6, Bryn Cefni Industrial Estate
Llangefni, Anglesey, North Wales
LL77 7XA, UK

Tel: +44 (0) 1248 722 777

Fax: +44 (0) 1248 750 490

info@fauntrackway.co.uk

www.f auntrackway.co.uk

Images for Illustration Purposes Only

Registered in England and Wales 09283749

All content © FAUN Trackway Limited 2026. All Rights Reserved